




CableGlider® Standard (STD) 220 Volt Cable Puller

The Condux CableGlider® STD 220 Volt Cable Puller offers portability and ease of set-up in a completely self-contained unit to adapt to a variety of pulling situations. It comes equipped with a three-speed removable power pack, providing up to 6,500 pounds (28,912 N) of pulling force at low speed. Speed changes are no problem with just a turn of a dial. Design features include a self-tailing capstan for added stability, a pivoting arm and a foot switch for operator convenience and safety. Accepts all diameter rope (self-tailing capstan accepts 5/8" (16 mm) to 7/8" (22 mm) rope only).

CableGlider®

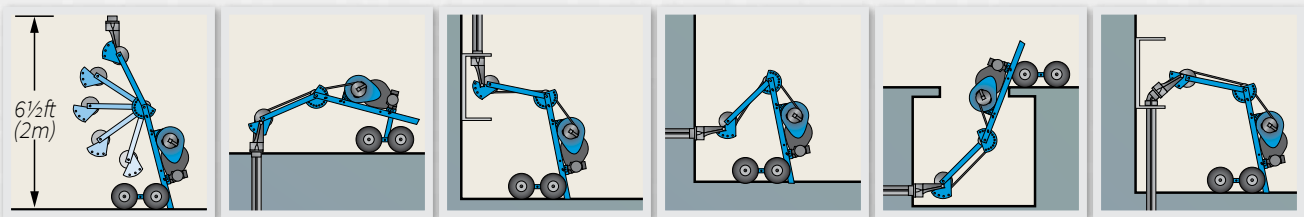

Product Models

CableGlider® STD - 220 Volt Cable Puller

CableGlider® STD - 220 Volt Cable Puller Split

What's in the box?

	08678025	08678025S
Puller	✓	✓
Foot Switch	✓	✓
Retaining Fork	✓	
Split Retaining Fork		✓
Conduit Adapters	✓	
Split Conduit Adapters		✓
2" (51mm)	✓	✓
3" (76mm)	✓	✓
3 1/2" (89mm)	✓	✓
4" (102mm)	✓	✓
Tool box for the accessories	✓	✓



Specifications

Description and Dimensions

Weight:	102.51Kg
Packaged Weight:	120.65Kg
Total Size:	Length 147.32cm x Width 68.58cm
Maximum Reach:	2m
Color:	Blue
Arms:	Single
Drive:	Chain
Pawl:	Anti Rotational

	Low / Low Speed		Low / High Speed		High / High Speed	
Pulling Force	<i>lbs</i>	<i>kN</i>	<i>lbs</i>	<i>kN</i>	<i>lbs</i>	<i>kN</i>
Maximum	6,500	28.9	3,500	15.6	1,000	4
Continuous	4,000	17.8	2,000	8.9	250	1.11
Pulling Speed	<i>ft/min</i>	<i>m/min</i>	<i>ft/min</i>	<i>m/min</i>	<i>ft/min</i>	<i>m/min</i>
No Load	17.5	5.3	39.2	12	77	23.5
At 2,000 lbs (8.9 kN)	13.5	4.1	18.8	5.7	—	—
At 4,000 lbs (17.8 kN)	9.5	2.9	—	—	—	—
At 6,000 lbs (26.7 kN)	7	2.1	—	—	—	—

Power Requirements

	230 VAC @ 5 Amp Min, 15 Amp Optimum
Peak Power	4.82 hp (3.6 kW)
Generator	4000 Watt Recommended*

Capstan

Description	Self tailing
Diameter	13.97cm
Width	11.18cm

Tires

	Height	Width
Front	26.67cm	7.62cm
Back	25.4cm	8.89cm

Advantages

- Portable
- Easy Set-up
- Completely self contained unit

Features

- Two speed removable power pack
- 6500 pounds of pulling force at low speed
- Self Tailing Capstan for added Stability
- Accepts all diameter rope
- Pivoting Arm
- Vertical pull from floor
- Vertical pull down from box
- Horizontal pull
- Horizontal Vault Pull
- Vertical Pull with 45 degree elbow

Options

- Transformer Volt Converter 4000 Watt
- Power Packs
- Adjustable Manhole Adapter
- Floor Mount Frame
- Floor/Conduit/Pole Mount Frame
- Extension Frame
- Conduit Adapters

*Note: Use of less than the recommended wattage generator may effect the pulling specifications listed above